

PURCHASED COMPONENT KEY FEATURES

DESCRIPTION OF REQUIREMENTS

DIMENSIONAL REQUIREMENTS (AS SHOWN ON DRAWING)

N/A

LOAD/RATING REQUIREMENT

N/A

MATERIAL REQUIREMENT

N/A

PACKAGING REQUIREMENT

N/A

OTHER REQUIREMENTS

- **MODULE DOME LED HARNESS LOW ROOF TRANSIT**
- **(25x) Zip-Ties**



THIS DRAWING IS THE PROPERTY OF ADRIAN STEEL COMPANY AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTERESTS OF ADRIAN STEEL COMPANY

PURCHASED COMPONENT

TOLERANCES & INSPECTION

UNLESS OTHERWISE SPECIFIED

ALL BEND ANGLES ARE 90 DEGREES

ALL DIMENSIONS ARE IN INCHES.

REFERENCE DIMENSIONS (X.XXX) DO NOT REQUIRE INSPECTION

FEATURES	HOLES/SLOTS	ANGLES
0.0 = ± .125	0.0 = ± .062	0° = ± 2°
0.00 = ± .062	0.00 = ± .031	0.0° = ± 1°
0.000 = ± .031	0.000 = ± .015	

Material Thickness: per ASTM Std.
Weld Callouts per AWS

RELEASE & REVISIONS

INITIAL ECN: 24359

CURRENT ECN: 24359

ECN DESCRIPTION:

QE8539 RELEASE MODULAR DOME LIGHTING

REVISED BY: MJF

REFERENCED SUPPLIER AND/OR MANUFACTURER
ECHOMASTER FLEET SOLUTIONS
REFERENCED SUPPLIER AND/OR MANUFACTURER PART NUMBER
CL-FT1

COLOR (ONLY LIST IF COLOR SPECIFIC)

COMODITY ITEM (Y/N) (YES = ALL DIMENSIONS AND NOTES ARE REFERENCE)
(NOTE: DIMENSIONS AND FEATURES MAY VARY FOR A COMODITY ITEM.)

YES

PRINTED DOCUMENT IS UNCONTROLLED

Sheet 1 of 1
REVISION LEVEL



ADRIAN STEEL IDENTIFICATION COMPANY

A

MAT'L USED: **PURCHASED**


DESIGNED BY: **MJF**

DESCRIPTION: **MODULE LED HARN LR FDT**

WEIGHT (Lbs.): **.50**

SEGMENT CODE: **EAU**

PART NUMBER: **63485**

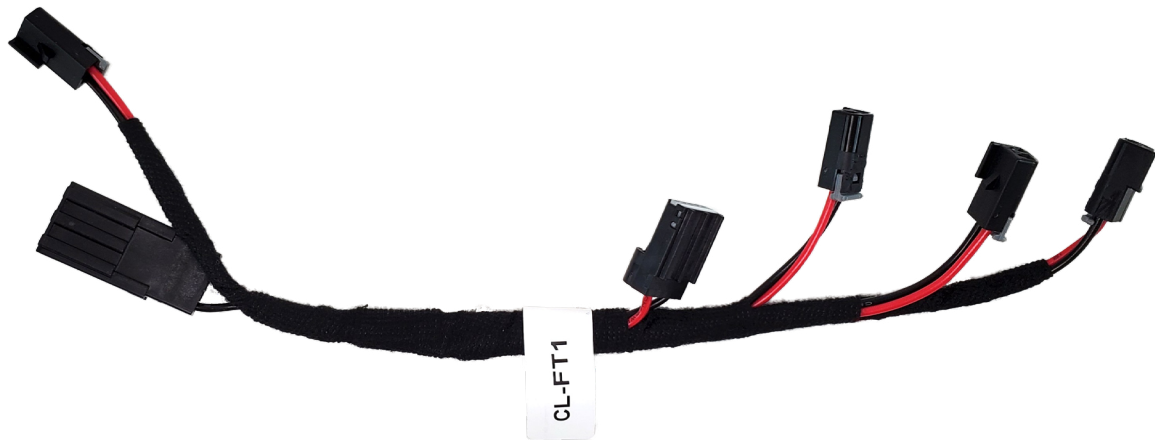

CL-FT1

Wiring Harness for Cargo Lighting 2020-2023 Ford Transit Van (Low Roof)

INSTALLATION MANUAL



Thank you for purchasing the **CL-FT1**

Table of Contents

- Page 3** - Tools Required For Installing Additional Accessories
Page 8 - Wiring Diagram

WHAT'S INCLUDED:

- Vehicle Specific Wire Harness (CL-FT1)
- 6" Cable Ties (25)

COMPATIBLE ACCESSORIES:

- LED Dome Lamp (STL40489-2)
- 1100mm Roof Bow Harness (P-HARRB1)
- 1570mm Roof Bow Harness (P-HARRB2)
- 2570mm Roof Bow Harness (P-HARRB3)
- 3470mm Roof Bow Harness (P-HARRB4)



TOOLS REQUIRED:



1. Diagonal Cutters
2. Phillips #2 Drill Bit
3. Drill



STEP 1:

Locate the OEM Cargo Lamp connection that is behind the vehicle's first roof bow on the driver's side of the vehicle.



STEP 2:



Unplug the OEM Cargo Lamp connectors and install the CL-FT1 harness between the two connectors.



STEP 3:

Install the STL40489 (or alternate CL-xxBLED) lights onto the center of each roof bow; leave the light connector exposed


- Peel the red adhesive liners off and stick the light in place
- Use the provided 3/4" screws to secure the STL40489 light to the roof rib

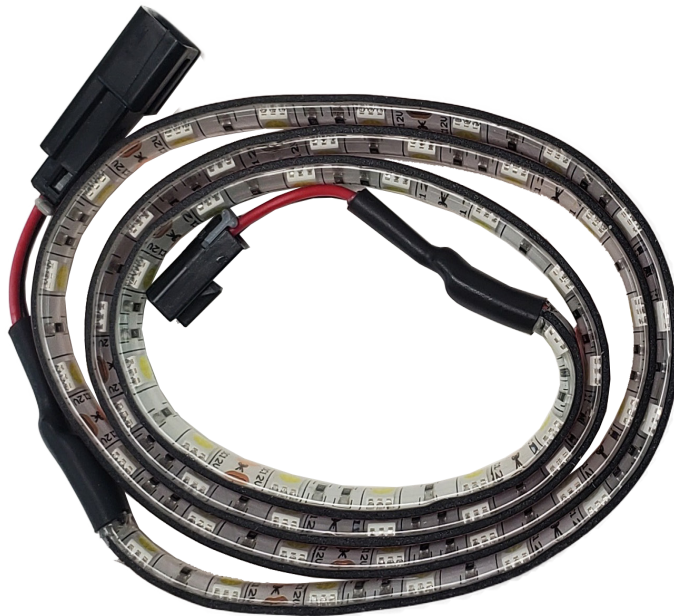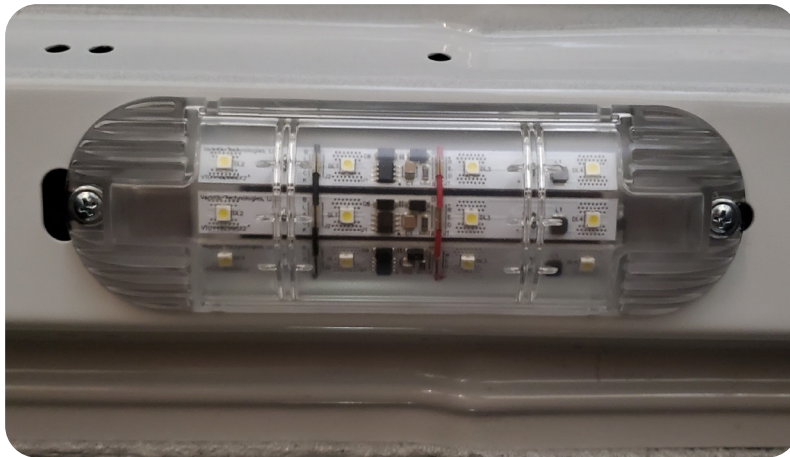

STEP 4:

Connect the appropriate P-HARRBx roof bow harness to each installed light.

- Refer to the diagram on page 8 to confirm proper P-HARRBx for each roof bow

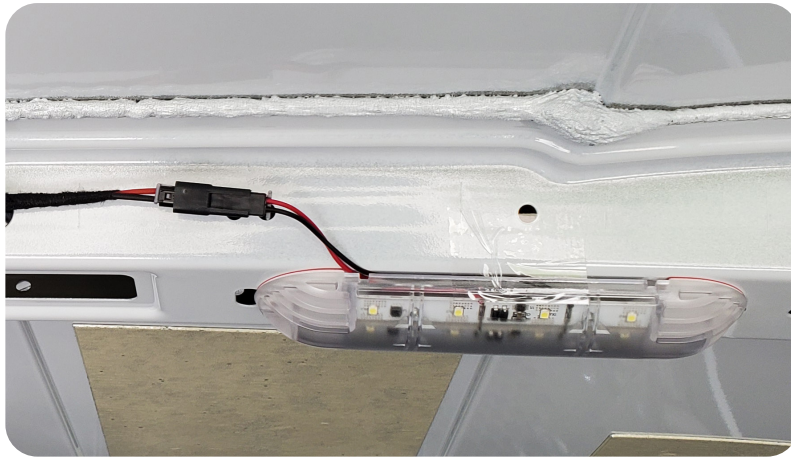

STEP 5:

Use the fir tree cable ties that are packaged with each P-HARRBx to secure the harness to the vehicle's roof bow. Trim off excess cable tie material with diagonal cutters after harness is secure.



STEP 6:

Route all P-HARRBx roof bow harnesses alongside the OEM wire harnesses.

- Use the provided 6" cable ties to secure the harness
- Trim off excess cable tie material with diagonal cutters



STEP 7:

Plug all installed P-HARRBx harnesses into the mating connectors on the CL-FT1 harness.

- Use the provided 6" cable ties to secure all harnesses
- Trim off excess cable tie material with diagonal cutters





STEP 8:

Confirm all installed lights are operational



Vehicle	Roof Bow 1	Roof Bow 2	Roof Bow 3	Roof Bow 4
Transit - Low Roof 130" WB	P-HARRB1	P-HARRB2	P-HARRB3	N/A
Transit - Low Roof 148" WB	P-HARRB1	P-HARRB2	P-HARRB3	P-HARRB4

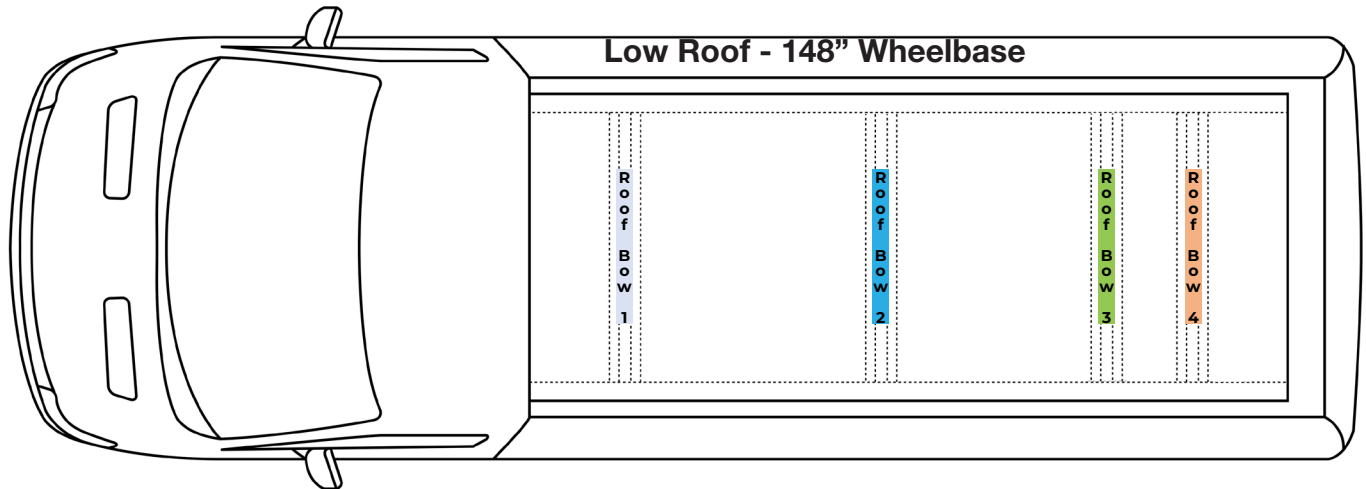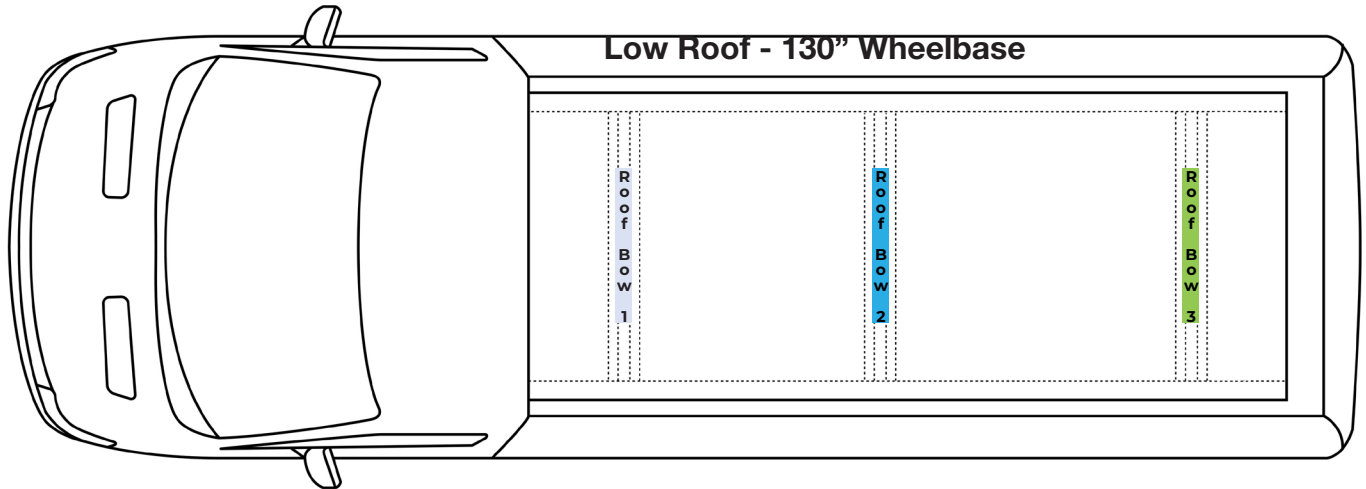



Phone – 866-766-2267

E-Mail – support@aampglobal.com



EchoMaster is a Power Brand of AAMP Global

EchoMaster.com