

FASTENER GROUPS LISTED BELOW ARE USED FOR ASSEMBLY AND INSTALLATION. SOME ASSEMBLY DRILLING IS REQUIRED. PARTITION INSTRUCTIONS & FASTENERS ARE WITH THAT UNIT. USE KD UNIT DRAWINGS TO IDENTIFY THEIR SEPARATE PARTS. CUSTOMER SPECIFIED SHELF DIMENSIONS ARE SHOWN HERE.

SYM. FASTENERS QTY DRILL

ASSEMBLY FASTENERS

●	{ 1/4-20 x 1/2" THP SCW.	(50)	{	9/32"
●	{ 1/4-20 HX. FLANGE NUT	(50)	{	
●	{ 1/4-20 x 3/4" HX.HD. SCW.	(2)	{	9/32"
●	{ 1/4-20 HX. FLANGE NUT	(4)	{	

INSTALLATION FASTENERS

●	{ 1/4-20 PLUSNUT "PB"	(4)	{	3/8"
●	{ 1/4-20 x 1" HH. SCW. FT	(4)	{	
●	{ 1/4 PLN WASH	(4)	{	
●	{ 1/4 SPLIT RING L'WASHER	(4)	{	
●	{ 5/16-18 PLUSNUT "PB"	(4)	{	
●	{ 5/16-18 x 1-1/2" HH. SCW.	(4)	{	1/2"
●	{ 5/16 PLN WASH	(4)	{	
●	{ 5/16 SPLIT RING L'WASHER	(4)	{	




ADRIAN STEEL CO.
906 JAMES STREET
ADRIAN, MI 49221
517/265-6194

KD SHELF UNIT
12 X 24 X 52

KD UNIT IS SHOWN FOR STREET SIDE INSTALLATION. ASSEMBLE "B" STYLE OPPOSITE FOR CURB SIDE INSTALLATION.
HEIGHT FROM FLOOR TO LOWEST SHELF WILL VARY DEPENDING ON THE HEIGHT OF YOUR VEHICLES WHEELHOUSE.
PLEASE REFER TO THE INTERIOR INSTALLATION SHEET FOR CORRECT SHELF HEIGHT BEFORE ASSEMBLY.

DWG BY	ECN#	DATE	CHK BY	PACKAGE#	ISS.
JLC	11100	3/10/08	ATS	S/L LHD4	B
PACKAGE WEIGHT-	43.22 lb	HORIZONTAL & VERTICAL	HCG = 26	VCG = 12	
ITEM	PART NO.	DESCRIPTION	QTY		

1	VM24	VERTICAL MEMBER 24"	4
2	SF21252	TOP TRAY 2X12X52	3
3	MB112	MOUNT BRACKET W/ FAS.	2

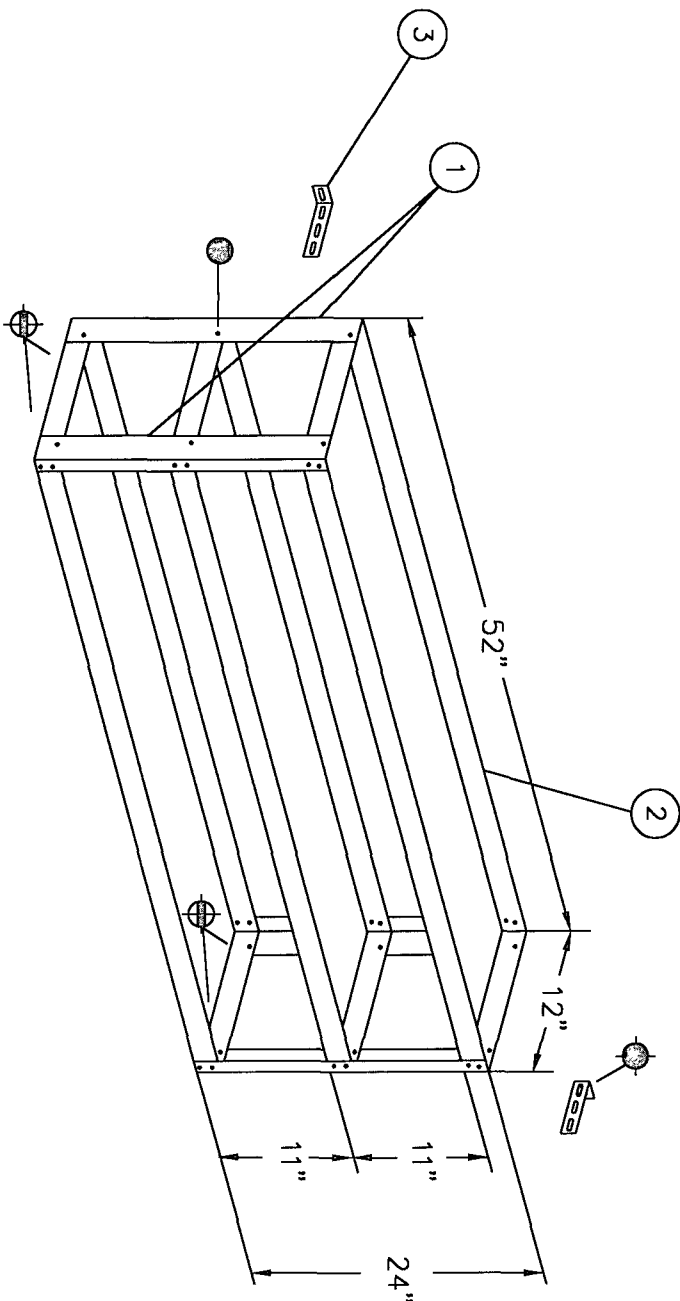

CAUTION:
DRILL THRU FLOOR WITH CARE
WATCH FOR GAS TANK, CONTROL
LINES, & ELECTRICAL WIRING.