PURCHASED COMPONENT KEY FEATURES

DESCRIPTION OF REQUIREMENTS

DIMENSIONAL REQUIREMENTS (AS SHOWN ON DRAWING)

LOAD/RATING REQUIREMENT

MATERIAL REQUIREMENT

N/A

PACKAGING REQUIREMENT

N/A

OTHER REQUIREMENTS

Includes vehicle mounting bracket





THIS DRAWING IS THE PROPERTY OF ADRIAN STEEL COMPANY AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTERESTS OF ADRIAN STEEL COMPANY

TOLERANCES & INSPECTION **RELEASE & REVISIONS** UNLESS OTHERWISE SPECIFIED 7165 INITIAL ECN: ALL BEND ANGLES ARE 90 DEGREES ALL DIMENSIONS ARE IN INCHES. 23033 REFERENCE DIMENSIONS (X.XXX) DO NOT REQUIRE INSPECTION

FEATURES 0.0 = ± .125 0.00 = ± .062 0.000 = ± .031 HOLES/SLOTS ANGLES 0° = ± 2° 0.0° = ± 1° 0.0 = ± .062 0.00 = ± .031 0.000 = ± .015

Material Thickness: per ASTM Std. Weld Callouts per AWS

CURRENT ECN:

CN DESCRIPTION: UPDATE MANUFACTURER AND MANUFACTURER PART #

REVISED BY: C.MOHLER

PURCHASED COMPONENT

AMEREX / BADGER

REFERENCED SUPPLIER AND/OR MANUFACTURER PART NUMBER B417T / 22430

COLOR (ONLY LIST IF COLOR SPECIFIC

COMODITY ITEM (Y/N) (YES = ALL DIMENSIONS AND NOTES ARE REFERANCE) (NOTE: DIMENSIONS AND FEATURES MAY VARY FOR A COMODITY ITEM.) YES

PRINTED DOCUMENT IS UNCONTROLLED

Sheet 1 of 1

PART / PRODUCT IDENTIFICATION



MAT'L USED:

ADRIAN STEEL COMPANY

DESIGNED BY: BDS

REVISION LEVEL


FIRE EXTINGUISHER 1A:10BC 2.5LB


WEIGHT 6

SEGMENT SAF PART NUMBER: PA8

INSTALLATION FASTENERS (2) #10-24 X 1/2 RHP SCW (2) #10-24 HEX FLANGE NUT

THIS IS A DRY CHEMICAL EXTINGUISHER THAT CAN BE USED ON ORDINARY COMBUSTIBLES, FLAMMABLE LIQUIDS, AND ELECTRICAL EQUIPMENT. IT SHOULD INCLUDE A VEHICLE MOUNTING BRACKET.

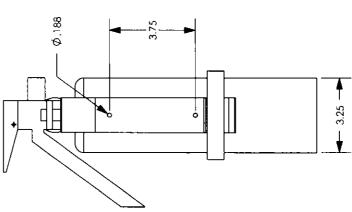





906 JAMES ST. ADRIAN, MI. 49221

THIS DRAWING IS THE PROPERTY OF (517) 265-6194

ADRIAN STEEL Co.

THIS DRAWING IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTERESTS OF ADRIAN STEEL Co.

CHK'D: RLS	32 BDS	CHKD: QKC	, BDS
핅	6/27/02	핑	2/9/04
RELEASED	EN-6071	REVISED	EN-7165

Description: REDRAWN IN SOLIDWORKS

222 CHK.D: \$\$\$ 00/00/00 Description: TEXT EN-0000 REVISED

UNLESS OTHERWISE NOTED: STANDARD TOLERANCES

 $0.00 = \pm .062$ $0.000 = \pm .031$ $0.0 = \pm 0.125$

0.0 = ± 1 $0^{\circ} = \pm 2^{\circ}$

015 Material Thickness = per AISI Notches, Stots, Holes = ±

MATERIAL:

Area (Sq.Ft.): 0.0000 Weight (lbs.): 5.0000

FINISH

Coverage {5q.Ft.}: 0.0000

	OTF CHECKED IN	DATE: 2/5/04
weignt {lbs.}:	DEAWN BY	1:4 DATE
wei	DESIGNED BY N/A	SCALE: 1

A BDS CHECK
DESIGNED BY

art Description	FIRE EXTINGUISHER	(2.1/21B ABC)
-----------------	-------------------	---------------

	Ť	
<u>1</u>	Γ	
-		
ET		
SHEET		
S		00
		=
		P
		Δ
		-
٧	ĕ	₫
4.	E×.	_

muN Int

Issue	4