



ADRIAN STEEL®

Cargo Management Solutions for Commercial Vehicles

8' LR WITH REMOVEABLE REMOVABLE REAR CROSSBOWS

PRODUCT WEIGHT

251.56 LBS

WIDTH X DEPTH X HEIGHT

55.5" X 193.67" X 9.71"

CAPACITY

SEE FEATURES BELOW

COLOR

BLACK

CATALOG NUMBER

SLRR-8FC23



PRODUCT FEATURES

This Loadrunner is designed for Adrian Open Bed product line, intended to fit on the F-150, 8' bed, Silverado 1500 8' bed, & Ram 1500, 8' bed platforms. It features 2" steel tubing. The capacity of the rack exceeds the truck bed wall load rating. Consult your vehicle manufacturer for their recommended rating. Be advised that placing loads above the vehicle bed increases the vehicle's tendency to overturn. Always load with caution.

SEE PAGE 2 FOR APPLICATION NOTES, ACCESSORIES AND OTHER PRODUCTS THAT WORK WITH THIS UNIT.

**ADRIAN STEEL®**

Cargo Management Solutions for Commercial Vehicles

8' LR WITH REMOVEABLE REMOVABLE REAR CROSSBOWS

CATALOG NUMBER SLRR-8FC23

PRODUCT APPLICATION

This Loadrunner is designed for Adrian Open Bed product line, intended to fit on the F-150, 8' bed, Silverado 1500 8' bed, & Ram 1500, 8' bed platforms. It features 2" steel tubing. The capacity of the rack exceeds the truck bed wall load rating. Consult your vehicle manufacturer for their recommended rating. Be advised that placing loads above the vehicle bed increases the vehicle's tendency to overturn.

ACCESSORIES THAT WILL WORK WITH THIS PRODUCT

CATALOG NUMBER	DESCRIPTION (smart)
HDW60504	RATCHET STRAP KIT, 4
LS4	LADDER STOP KIT, LR
BS2	LIGHT MOUNT KIT LR,2S
70-3	CONDUIT KIT 4" W/LORUN MT
70-4	CONDUIT KIT 6" W/LORUN MT
TFKFDT196HE23W	TOP, 96" F-150, HE23W
TFKFDT196HM23W	TOP, 96" F-150, HM23W
TFKFDT196KM23W	TOP, 96" F-150, KM23W
TFKGMT196BM23W	TOP, 96" SILV 1500, BM23W
TFKGMT196HE23W	TOP, 96" SILV 1500, HE23W
TFKGMT196HM23W	TOP, 96" SILV 1500, HM23W
TFKRAM196BM23W	TOP, 96" RAM 1500, BM23W
TFKRAM196HE23W	TOP, 96" RAM 1500, HE23W
TFKRAM196HM23W	TOP, 96" RAM 1500, HM23W
TS-BOX8	TOP SIDE BOX, 8"

The information contained in this document is the sole property of ADRIAN STEEL COMPANY. ADRIAN STEEL COMPANY retains the right to modify and/or change the product of its design at any time with prior notification.

INSTR. NUMBER : **INS81001**

PG: **1**

REV: **A**

PART NUMBER :

SLRR RACKS

PART DESC. :

LOAD RUNNER WITH
REMOVABLE CROSSBARS

NOTE: THIS INSTRUCTION IS
VALID FOR THE FOLLOWING
KITS:

- SLRR-8FC23

- SLRR-6FC23

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	26610-0	PLUG SQUARE 2"	8
2	80858-B	REAR DS TRUSS SLRR 8', BLK	1
3	80859-B	REAR PS TRUSS SLRR 8', BLK	1
4	81177-B	3 PIECE FRONT TRUSS DS, BLK	1
5	81178-B	3 PIECE TRUSS FRONT PS, BLK	1
6	26572-0	CROSS TUBE FRONT	1
7	26575-0	CROSSBAR MIDDLE	1
8	27231-0	SPOILER	1
9	79672	8' MIDDLE TRUSS DS , BLK	1
10	79673	8' MIDDLE TRUSS PS, BLK	1
11	80857-B	CROSSBOW ASSM WITH TALLER FOOT, BLK	1
12	80983-B	SLRR CROSSBAR TUBE, BLK	2
13	26611-0	RING PIN ASSY	4
14	FAS 0244	SCREW, HEX HD, 5/16-18X3.00 STAINLESS STEEL, GRADE 5	8
15	FAS0552	WASHER, FLAT, 5/16, SST	36
16	FAS0360	SCREW,ST,THP 14-10X.75 SS	4
17	26609	PLUG ROUND 2"	4
18	FAS0248	NUT, NYLON INSERT LOCK, 5/16-18 SST	18
19	FAS0243	SCREW, HEX HD, 5/16- 18X2.50 STAINLESS STEEL	10
20	80502	HAIRPIN KEY FOR .5" CLEVIS PIN	4

TOOLS NEEDED:

- 1/2 SOCKET

- 1/2 WRENCH

- 9/16 SOCKET

- 9/16 WRENCH

- RATCHET

- MALLET

GET TO KNOW THE VEHICLE - AT THE BEGINNING OF ANY INSTALLATION, CHECK THE LOCATION OF THE FUEL TANK, FUEL LINES, BRAKE LINES, HIGH VOLTAGE BATTERIES AND WIRING HARNESSSES TO AVOID INJURY OR PROPERTY DAMAGE FROM TOOL CONTACT.

SEAL ALL EXTERIOR HOLES - ALL INSTALLATION HOLES SHOULD BE SEALED WITH BUTYL TAPE OR SILICON TO PREVENT WATER AND EXHAUST GASES FROM ENTERING THE VEHICLE.

CONTROL DRILL DEPTH - TO AVOID DAMAGE TO THE VEHICLE, USE A DRILL STOP OR CLEARED STEP BIT WHEN DRILLING INSTALLATION HOLES.

ALWAYS ADD PRIMER - WHEN ADDING INSTALLATION HOLES BE SURE TO USE A SELF-ETCHING PRIMER TO PREVENT CORROSION, FASTENER FAILURE AND INJURY.

MOUNTING POINTS MUST HAVE METAL-TO-METAL CONTACT - USE PROVIDED MOUNTING SPACERS TO ACCOMMODATE FOR VEHICLE FEATURES, CARPET OR SUBFLOORS.

PROVIDE CLEARANCE FOR SPACERS - IF THE INSTALLATION VEHICLE CONTAINS A CARPET OR SUBFLOOR, USE A 1-3/16" DIAMETER CARPET CUTTER (P/N: 31183-0) AT ALL MOUNTING LOCATIONS TO OPEN UP ROOM FOR SPACERS.

CHECK SPACER ORIENTATION - BE SURE THAT THE INDENT IN THE SPACER COVERS THE PLUSNUT HEAD; THIS ENSURES THE MOST METAL-TO-METAL CONTACT AND REDUCES VIBRATION.

PLUSNUT INSTALLATION - A PLUSNUT GUN IS RECOMMENDED FOR PLUSNUT INSTALLATION FOR ITS PRODUCTION SPEED. HOWEVER, A PLUSNUT SETTING TOOL CAN ALSO BE USED (P/N: 22200-0).


THRU-BOLT CLEARANCE - WHEN USING A THRU-BOLT AT ANY MOUNTING LOCATION, BE SURE THAT YOUR HOLE HAS 1/16" CLEARANCE.

BEST PRACTICE: ORGANIZE ALL FASTENERS & VERIFY THAT ALL ARE ACCOUNTED FOR

PAGE:

3**FASTENERS USED****BAG REFERENCE: BAG80998**

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	FAS0360	SCREW,ST,THP 14-10X.75 SS	4
2	26609	PLUG ROUND 2"	2
3	26611-0	Ring Pin Assy	4
4	80502	HAIRPIN KEY FOR .5" CLEVIS PIN	4
5	FAS0243	Screw, Hex Hd, 5/16-18x2.50 Stainless Steel	2

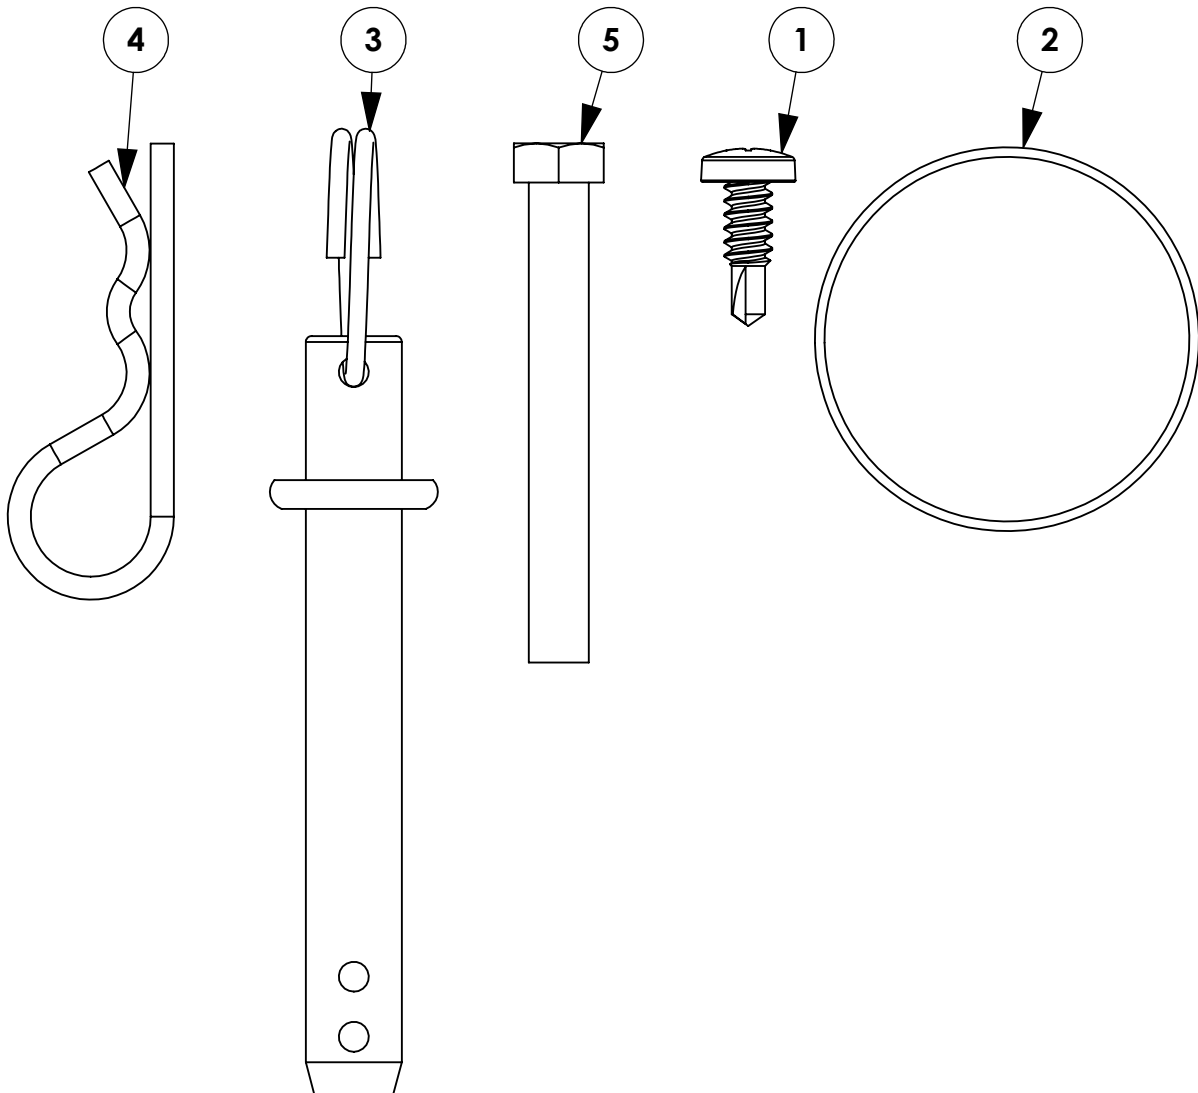**NOTE: EXAMPLE ON NEXT PAGE**


INTENTIONALLY LEFT BLANK

BEST PRACTICE: ORGANIZE ALL FASTENERS & VERIFY THAT ALL ARE ACCOUNTED FOR

PAGE:

5**FASTENERS USED****BAG REFERENCE: BAG77706****NOTE: SPLIT BOM FOR LARGE FASTENER BAGS, PLACE OTHER HALF ON NEXT PAGE**




ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	26618-0	Silicone Sealant	1
2	FAS0243	Screw, Hex Hd, 5/16-18x2.50 Stainless Steel	8
3	FAS 0244	Screw, Hex Hd, 5/16-18x3.00 Stainless Steel, Grade 5	16
4	FAS0248	Nut, Nylon Insert Lock, 5/16-18 SST	24
5	FAS0283	Screw, Hex Hd, 5/16-18 x.875 SST	12
6	FAS0552	Washer, Flat, 5/16, SST	60
7	FAS0588	Washer, Lock, Split, 5/16, SS	12
8	05586-0	Butyl Tape, T224 -1/2"X 1' Roll	1
9	FAS0110	Nut,Hex Nylk 3/8-16 SS W	4
10	FAS0294	SCREW, HH 3/8-16X1.25 SS	4
11	FAS 0720	Washer,Flat 3/8 SS	8

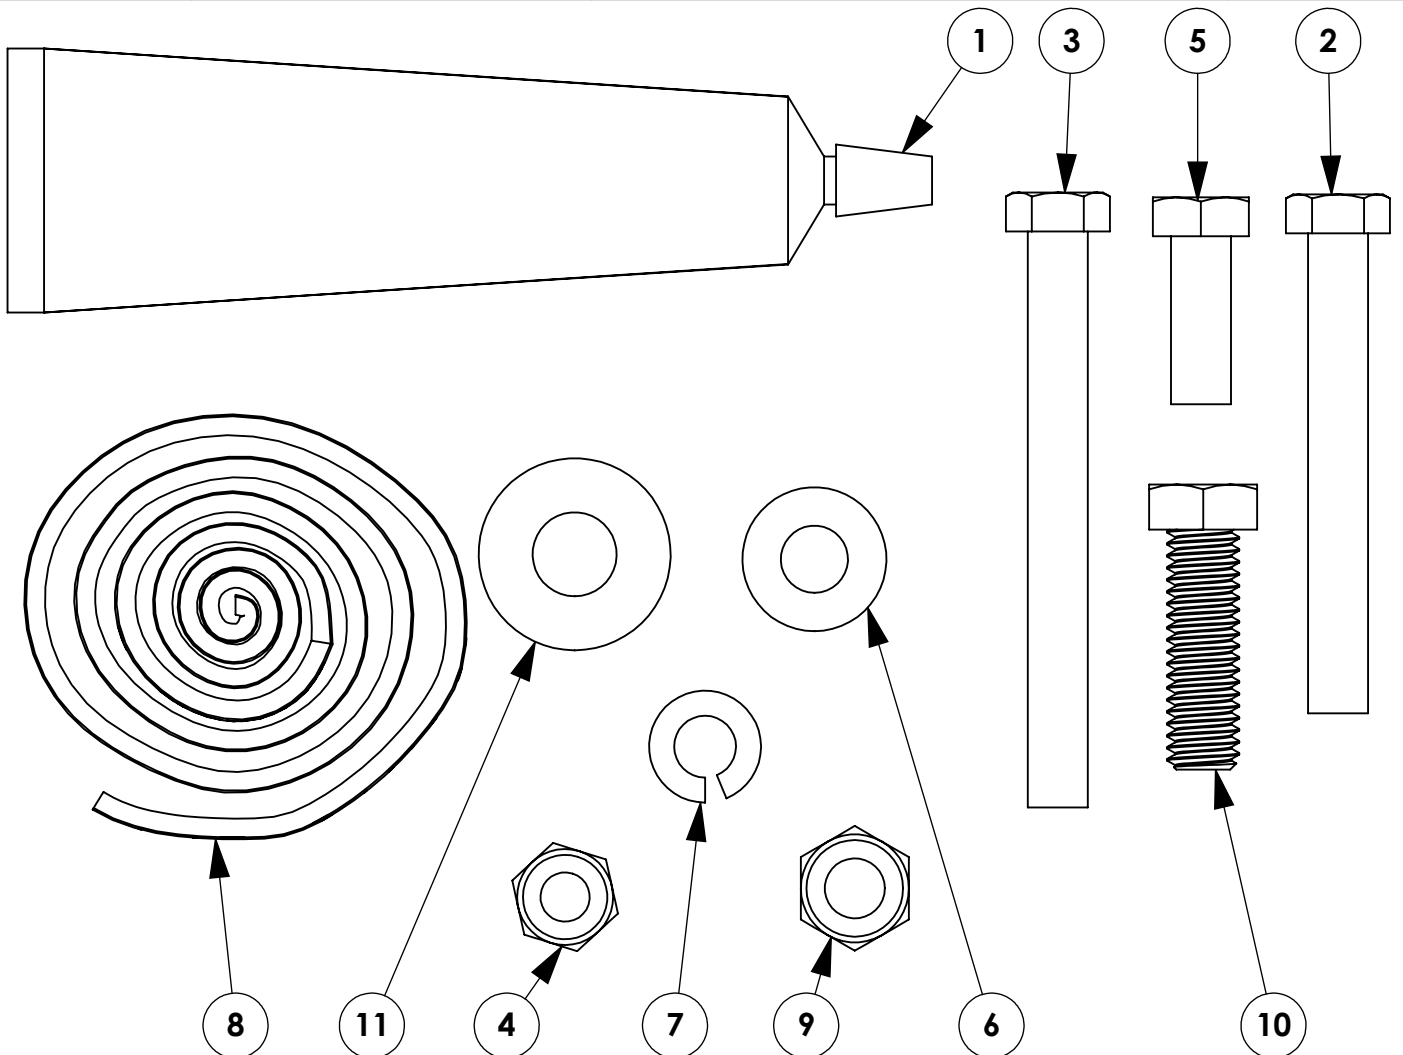

INTENTIONALLY LEFT BLANK

FASTENERS USED**BAG REFERENCE: BAG77701**


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	26610-0	Plug Square 2"	8
2	26609-0	PLUG ROUND 2"	2
3	63490	RAIL SLIDE, 1"	12

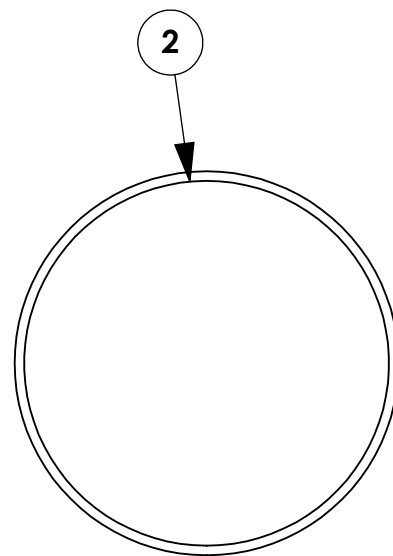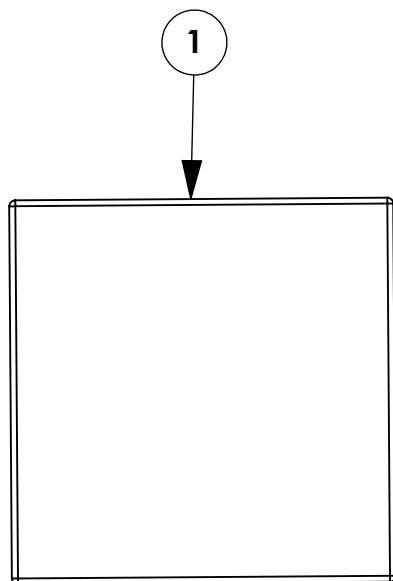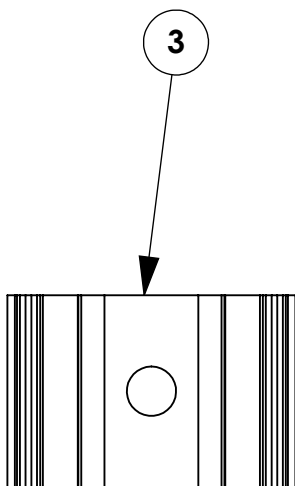

INTENTIONALLY LEFT BLANK

STEP 1 - CONNECT CROSSBARS



Step 1.1
FULLY TIGHTEN
FAS0243
FAS0552 (2)
AND FAS0248
(8 PLACES)
1/2 WRENCH
1/2 SOCKET

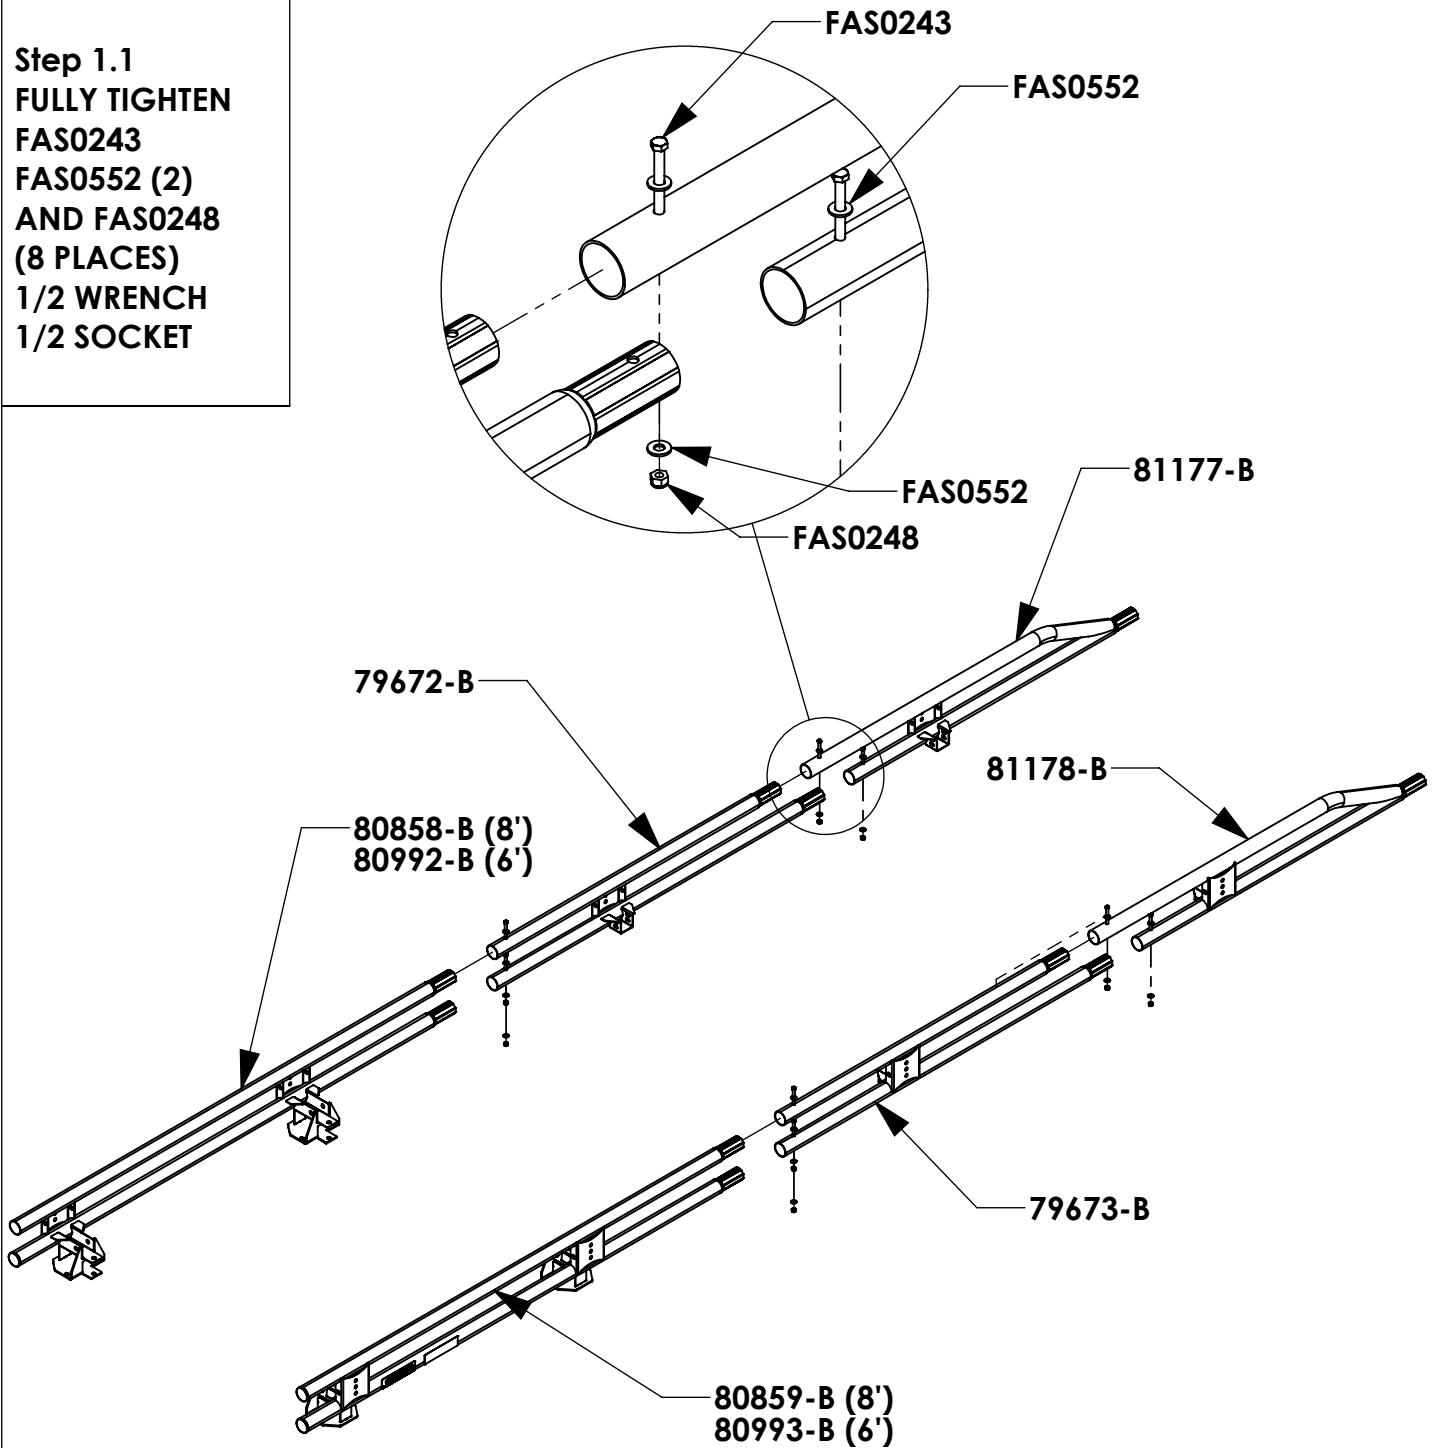

STEP 2 - INSTALL FRONT HOOP

Step 2.1
FULLY TIGHTEN
FAS0243
FAS0552 (2)
AND FAS0248
TO ATTACH
FRONT HOOP TO
TRUSS SECTIONS
(2) PLACES
1/2 WRENCH
1/2 SOCKET

Step 2.2
INSTALL ROUND
END CAP 26609-0
IN 4 LOCATIONS
SHOWN

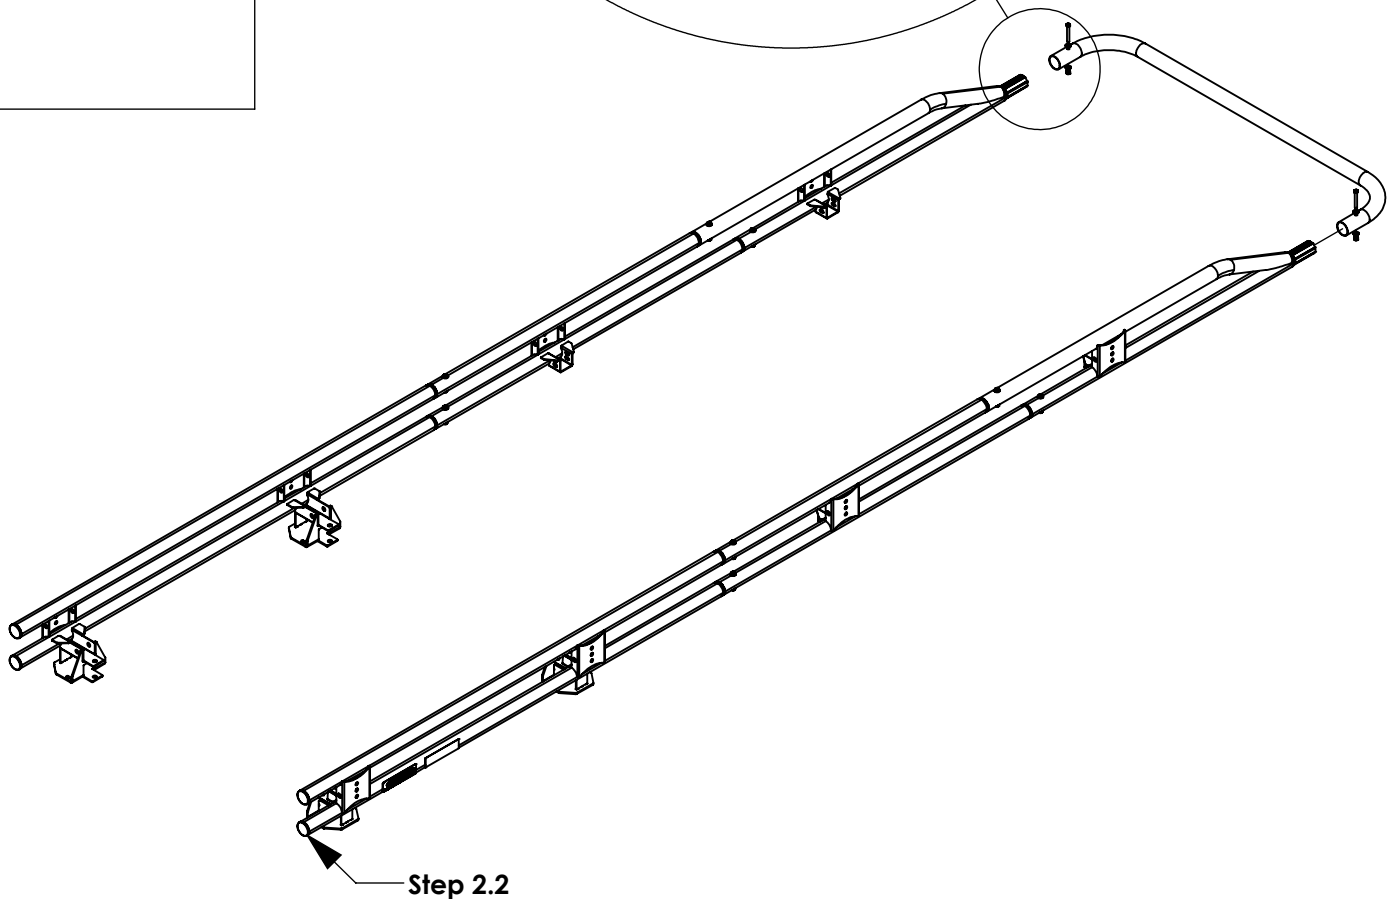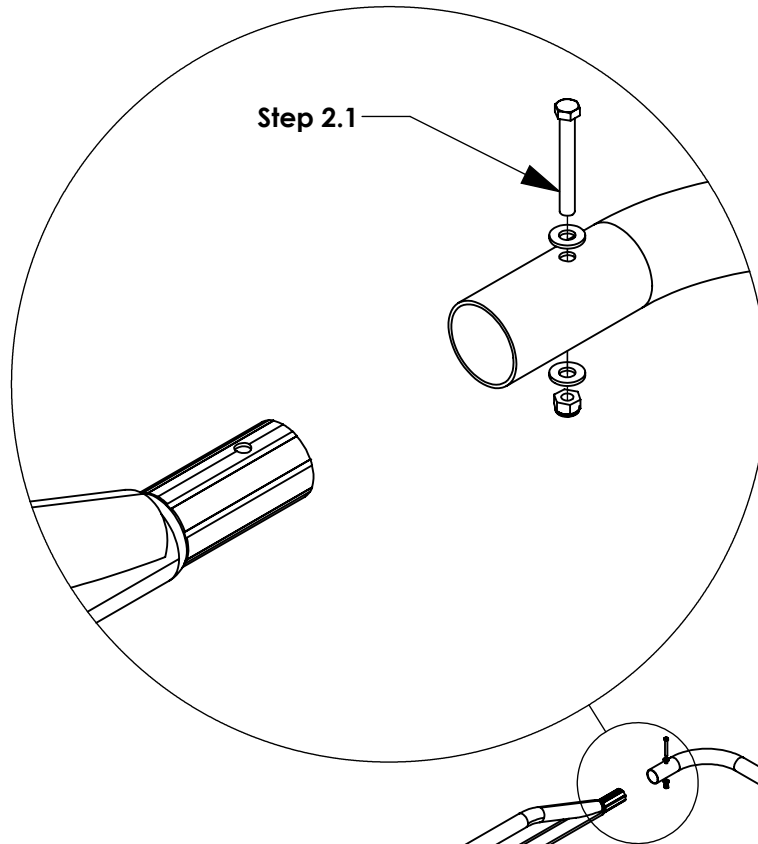

IMPORTANT: DO NOT SWAP FRONT AND REAR TRUSS SECTIONS


STEP 3 - INSTALL CROSSBARS

**Step 3.1
INSTALL SQUARE
ENDCAPS
(26610-0) ON
ALL 4
CROSSBARS
(8) PLACES**

**Step 3.2
FULLY TIGHTEN
FAS0244
FAS0552 (2) and
FAS0248 TO
ATTACH
CROSSBARS TO
TRUSS SECTIONS
(8) PLACES
1/2 WRENCH
1/2 SOCKET**

**Step 3.3
26611-0 and
80502 ATTACH
TO 80983-B
THROUGH 80854
(4 PLACES)**

**Step 3.4
INSTALL SPOILER
(27231-0) ON
FRONT HOOP
USING FAS0360
(4)**

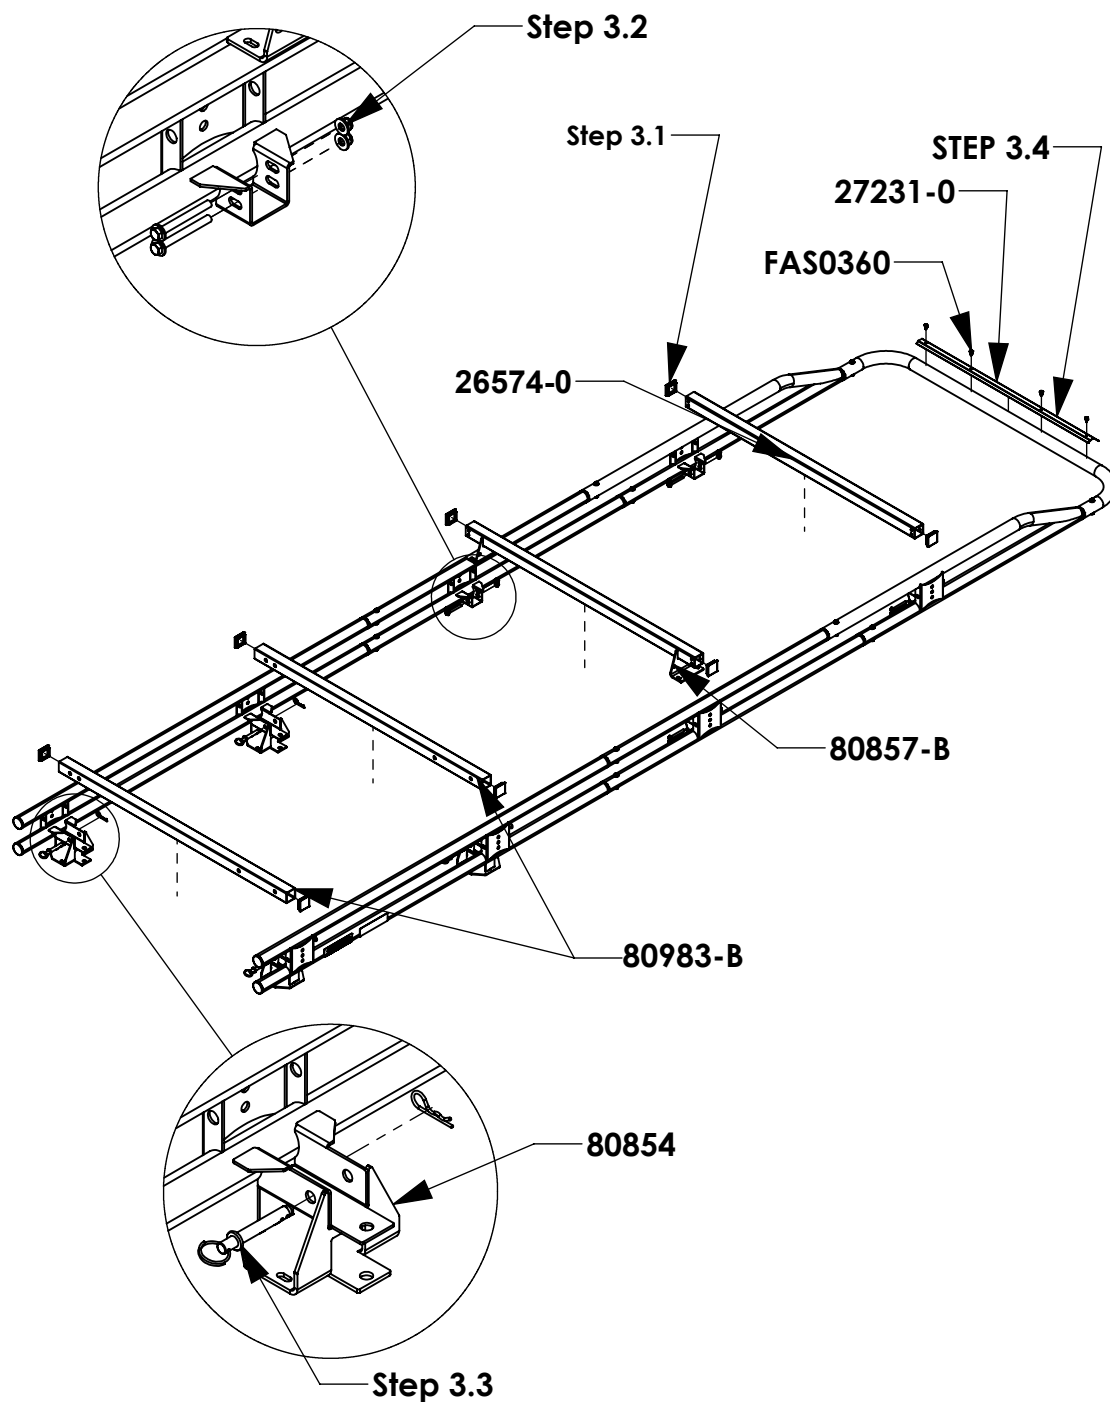

STEP 4 - ATTACH TO TOPPER

Step 4.1
PLACE 6 RAIL
SLIDES IN EACH
TOPPER ROOF
RAIL
CENTER RACK
ON ROOF AND
ALIGN SLIDES
WITH
CROSSBOW FEET
MTG HOLES

Step 4.2
LOOSLEY TIGHTEN
INSTALL RACK TO
TOPPER USING
FAS0283 FAS0552
FAS0558
(12PLACES)
1/2 WRENCH
1/2 SOCKET

