




ADRIAN STEEL

Cargo Management Solutions for Commercial Vehicles

2 TANK RACK

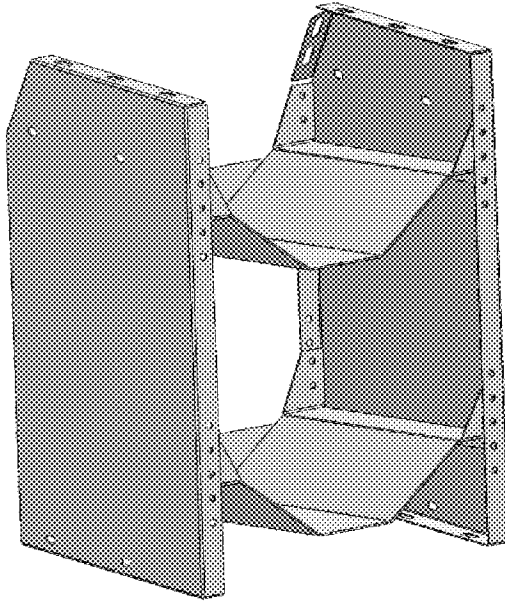

PRODUCT WEIGHT

17 Lbs

WIDTH x DEPTH x HEIGHT

15" x 13 1/4" x 20 1/2"

CAPACITY

2 TANKS

COLOR

GRAY

CATALOG NUMBER

TS2T

PRODUCT FEATURES

**2 TANK RACK WITH ADJUSTABLE SHELVES AND 2 TIE STRAPS.
CAN BE COMBINED WITH TA21 CABINET TO CREATE AN MD538
CABINET AND RACK ASM.**

PAGE 1 of 1


The information contained in this document is the sole property of ADRIAN STEEL COMPANY. ADRIAN STEEL COMPANY retains the right to modify and/or change the product of its design at any time without prior notification.

Introduction / Comments:

THIS RACK IS DESIGNED TO ACCOMMODATE 2 30 OR 50 LB TANKS. IT CAN ALSO BE MOUNTED ON TOP OF TA21 CABINET TO CREATE AN MD538 CABINET AND RACK MODULE.


Note:

It is advised that all fasteners used in this assembly and installation of this Rack should be checked for tightness at the following intervals: @ 2-weeks and again @ 6-weeks of operation. This preventive maintenance step must be completed to ensure your package gives you long service life.

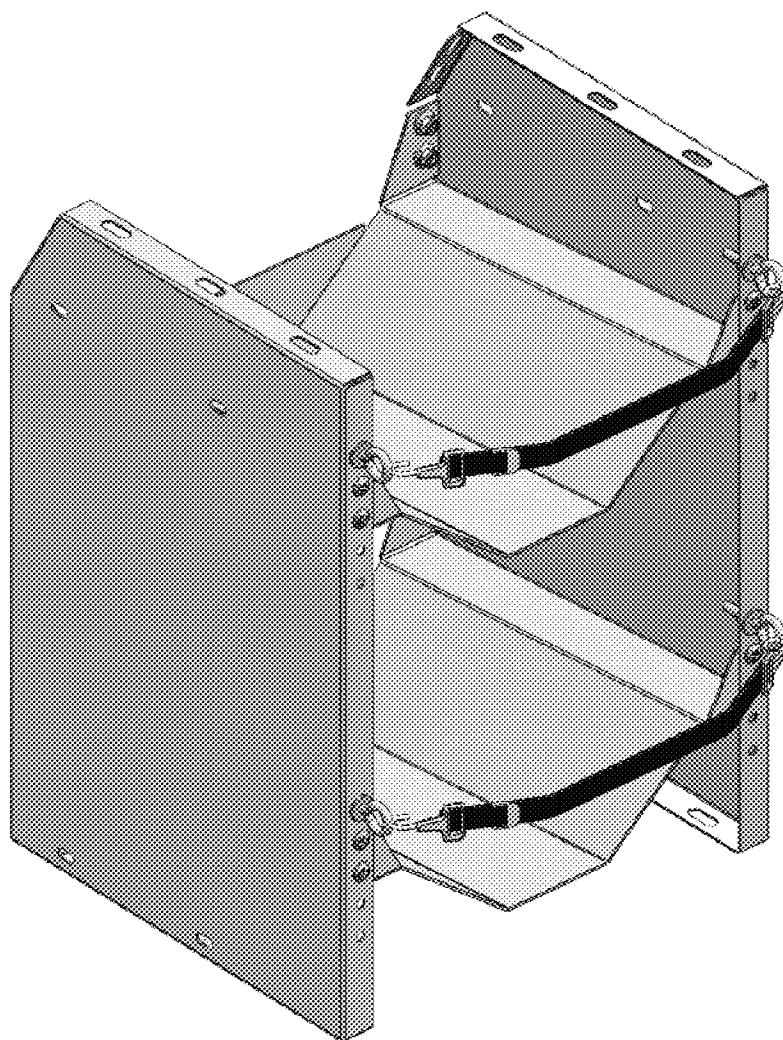

TS2T 2 TANK RACK


- PRECAUTIONS -



CAUTION



**THE USE OF AIR IMPACT TOOLS CAN
OVER-TORQUE FASTENERS AND
CAUSE FASTENER FAILURE!**

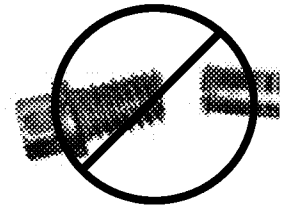

CAUTION



**ALL INSTALLATION HOLES SHOULD BE SEALED
WITH SILICON OR BUTYL SEALANT TO PREVENT
EXHAUST FUMES FROM ENTERING THE VEHICLE!**



DANGER



**INSPECT FOR FUEL TANK, FUEL LINES, BRAKE LINES, HIGH
VOLTAGE BATTERIES AND ELECTRICAL LINES PRIOR TO
DRILLING TO AVOID DAMAGING CRITICAL VEHICLE SYSTEMS
OR INJURY TO INSTALLER DURING INSTALLATION PROCESS!**



CAUTION



**TO AVOID DAMAGING THE VEHICLE ALWAYS
USE DRILL STOPS WHEN DRILLING ANY IN-
STALLATION HOLES!**



- IMPORTANT WARRANTY REQUIREMENTS -

1. SUBSTITUTING ADRIAN STEEL SPECIFIED FASTENERS FOR ASSEMBLY AND/OR INSTALLATION WILL VOID YOUR PRODUCT WARRANTY.
2. ALL HOLES DRILLED INTO VEHICLE SHOULD HAVE THE RAW METAL EDGES SEALED WITH A SELF-ETCHING PRIMER TO RESIST CORROSION AND POTENTIAL FASTENER POINT FAILURE.
3. ALL FASTENERS USED IN THE INSTALLATION OF THIS PRODUCT SHOULD BE TIGHTENED TO THE TORQUE(S) SPECIFIED IN THESE INSTRUCTIONS.
4. THESE INSTRUCTIONS SHOULD BE KEPT WITH THE VEHICLE.


THE BASIC TOOLS NEEDED FOR MOST INSTALLATIONS




DRILL



DRILL BIT WITH
STOP

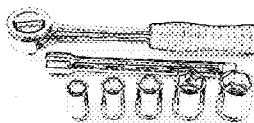

RATCHET, SOCKETS
AND/OR WRENCHES



SCREWDRIVERS




MEASURING TAPE


ADDITIONAL TOOLS MAY BE NEEDED FOR THIS INSTALLATION AND THEY WILL BE IDENTIFIED IN THE STEPS THAT FOLLOW.

BAGTST4
FASTENER BAG, TANK RACK
NOTE : THERE WILL BE EXTRA FASTENERS


ITEM NO.	PART NUMBER	DESCRIPTION	QTY
1	BAG0509-A	5" x 9" 4MIL AUTOSAG	1
2	FAS0061	Screw, Truss Hd. Ph. 1/4-20x0.50	32
3	FAS0055	Flat Hex Flange Nylock 1/4-20	40
4	FAS0050	Eyebolt 1/4x20x0.5x0.88	8
5	FAS0067	Washer Flat 1/4	8

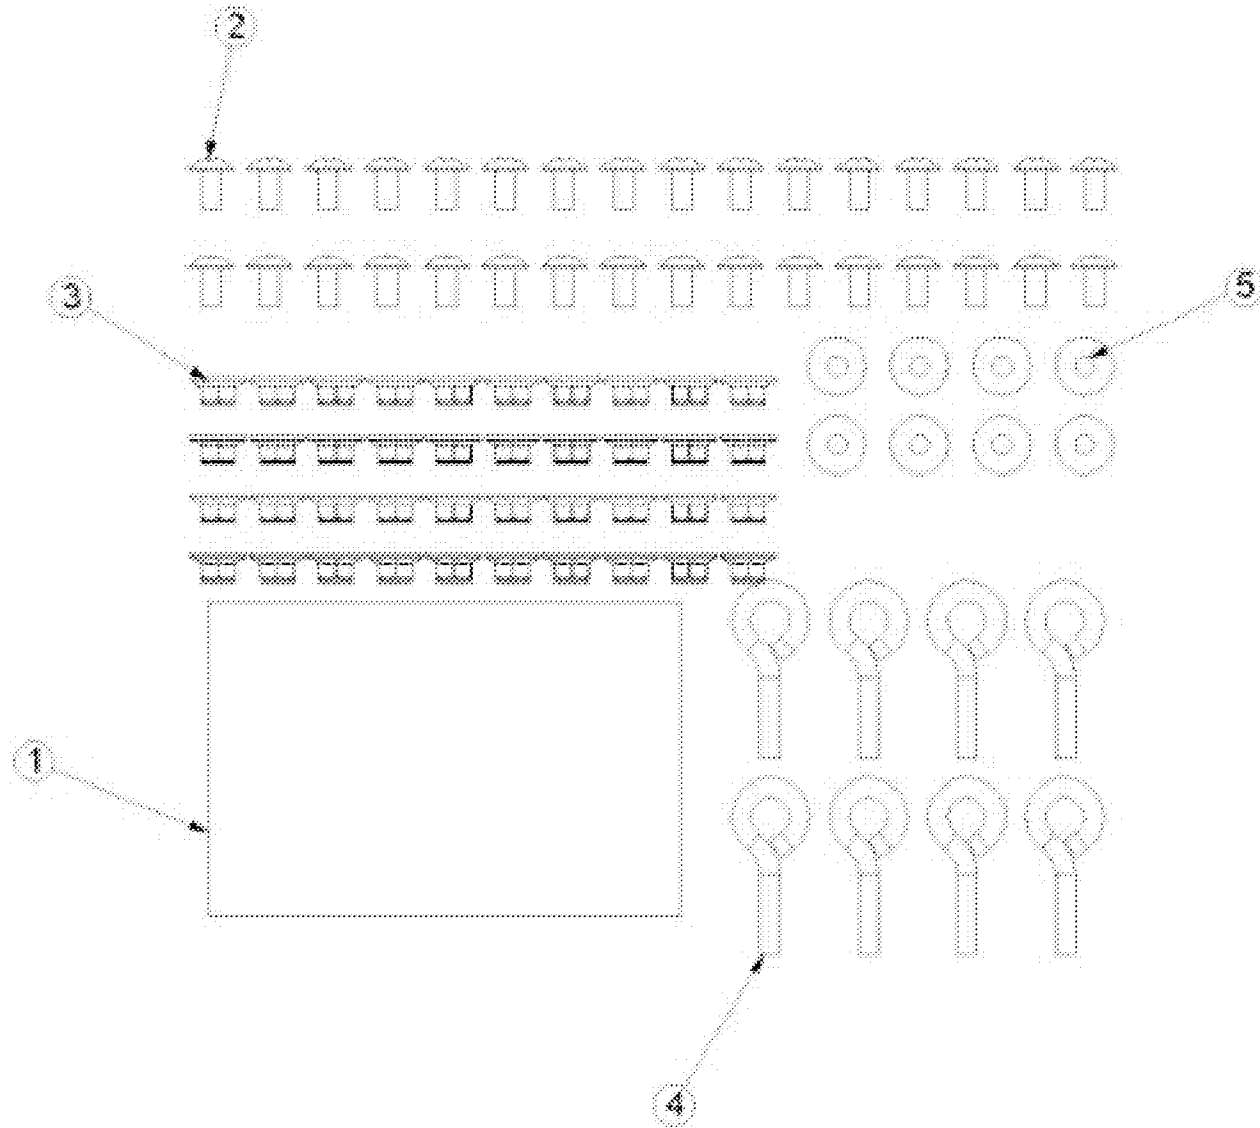


MAJOR COMPONENTS REQUIRED

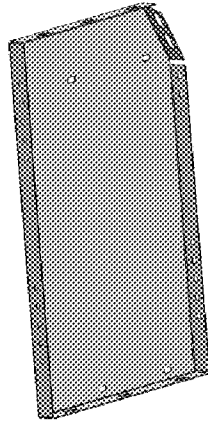

41816 LH END PANEL

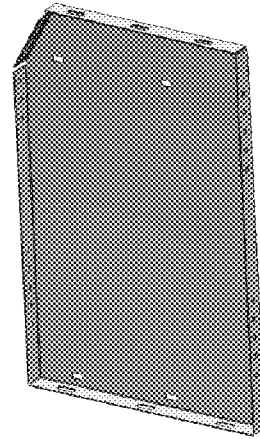

41817 RH END PANEL

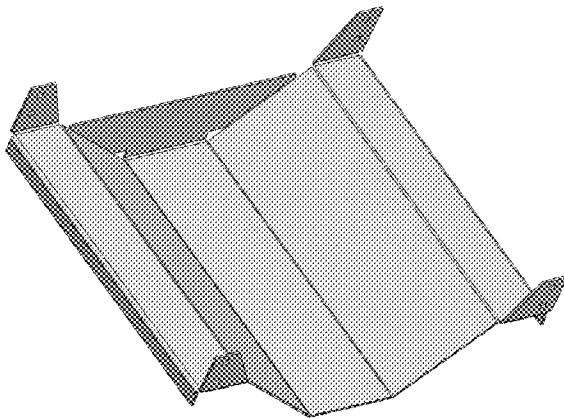

TH3050 TANK SHELF, 2 REQ'D



29895-0 STRAP ASM, 2 REQ'D

LOCATE AND FASTEN SHELVES TO END PANELS USING FAS0061 TRUSS HEAD SCREWS AND FAS0055 HEX FLANGE NUTS, 2 PER CORNER (8 PER SHELF). NEXT, INSTALL 4 EYE-BOLTS WITH FLAT WASHERS AGAINST EYE AND SECURE WITH FAS0055 HEX FLANGE NUTS. ADJUST AND SNAP ONTO EYEBOLTS THE STRAP ASSEMBLIES. THE RACK IS NOW READY TO BE INSTALLED IN VEHICLE OR ONTO TA21 CABINET.

