

PURCHASED COMPONENT KEY FEATURES

DESCRIPTION OF REQUIREMENTS

DIMENSIONAL REQUIREMENTS (AS SHOWN ON DRAWING)

N/A

LOAD/RATING REQUIREMENT

N/A

MATERIAL REQUIREMENT

N/A

PACKAGING REQUIREMENT

N/A

OTHER REQUIREMENTS

Harness needed for reverse power.

AAMP camera system / Transit & E-Transit.



THIS DRAWING IS THE PROPERTY OF ADRIAN STEEL COMPANY AND IS NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTERESTS OF ADRIAN STEEL COMPANY

TOLERANCES & INSPECTION

UNLESS OTHERWISE SPECIFIED

ALL BEND ANGLES ARE 90 DEGREES

ALL DIMENSIONS ARE IN INCHES.

REFERENCE DIMENSIONS (X.XXX)
DO NOT REQUIRE INSPECTION

FEATURES	HOLES/SLOTS	ANGLES
0.0 = ± .125	0.0 = ± .062	0° = ± 2°
0.00 = ± .062	0.00 = ± .031	0.0° = ± 1°
0.000 = ± .031	0.000 = ± .015	

Material Thickness: per ASTM Std.
Weld Callouts per AWS

RELEASE & REVISIONS

INITIAL ECN: **25489**

CURRENT ECN: **25489**

ECN DESCRIPTION:

Release

REVISED BY: **N/A**

PURCHASED COMPONENT

REFERENCED SUPPLIER AND/OR MANUFACTURER

AAMP

REFERENCED SUPPLIER AND/OR MANUFACTURER PART NUMBER

P-BUA-TRANSIT-AMAZON

COLOR (ONLY LIST IF COLOR SPECIFIC)

COMODITY ITEM (Y/N) (YES = ALL DIMENSIONS AND NOTES ARE REFERENCE)
(NOTE: DIMENSIONS AND FEATURES MAY VARY FOR A COMODITY ITEM.)

YES

PRINTED DOCUMENT IS UNCONTROLLED

Sheet 1 of 1

PART / PRODUCT IDENTIFICATION



ADRIAN STEEL®

ADRIAN STEEL COMPANY
906 JAMES STREET, ADRIAN, MI 49221

REVISION LEVEL

A

MAT'L USED:

DESIGNED BY: **AMB**

DESCRIPTION:

HARN, BU INT TR

WEIGHT (Lbs.): **1.0**

SEGMENT CODE: **ELE**

PART NUMBER: **67632**

Coverings	
Id	Assembly
[16]	
[17]	

- Notes
- 1 Cover wiring between C1 and C2 with cloth tape; leave 1/2" of exposed wiring behind connector
 - 2 Tape lock split loom behind C3 and C4
 - 3 Add HEYCO rubber grommet Part# G1174, 18" from splice, to the outside of the corrugated tubing.





From	To	Color	Gauge
C1.1	S2	Black	18 AWG
C1.2	C2.2	White	18 AWG
C1.3	C2.3	Grey	18 AWG
C1.4	S1	Red	18 AWG

From	To	Color	Gauge
S1	C1.4	Red	18 AWG
S1	C2.4	Red	18 AWG
S1	C3.1	Red	18 AWG
S1	C5.1	Red	18 AWG
S2	C1.1	Black	18 AWG
S2	C2.1	Black	18 AWG
S2	C3.2	Black	18 AWG
S2	C6.1	Black	18 AWG

From	To	Color	Gauge
C2.1	S2	Black	18 AWG
C2.2	C1.2	White	18 AWG
C2.3	C1.3	Grey	18 AWG
C2.4	S1	Red	18 AWG

From	To	Color	Gauge
C3.1	S1	Red	18 AWG
C3.2	S2	Black	18 AWG

From	To	Conductor	Color	Gauge	From Contact PN
C5.1	S1	W3.Red	Red	18 AWG	
C6.1	S2	W9.Black	Black	18 AWG	

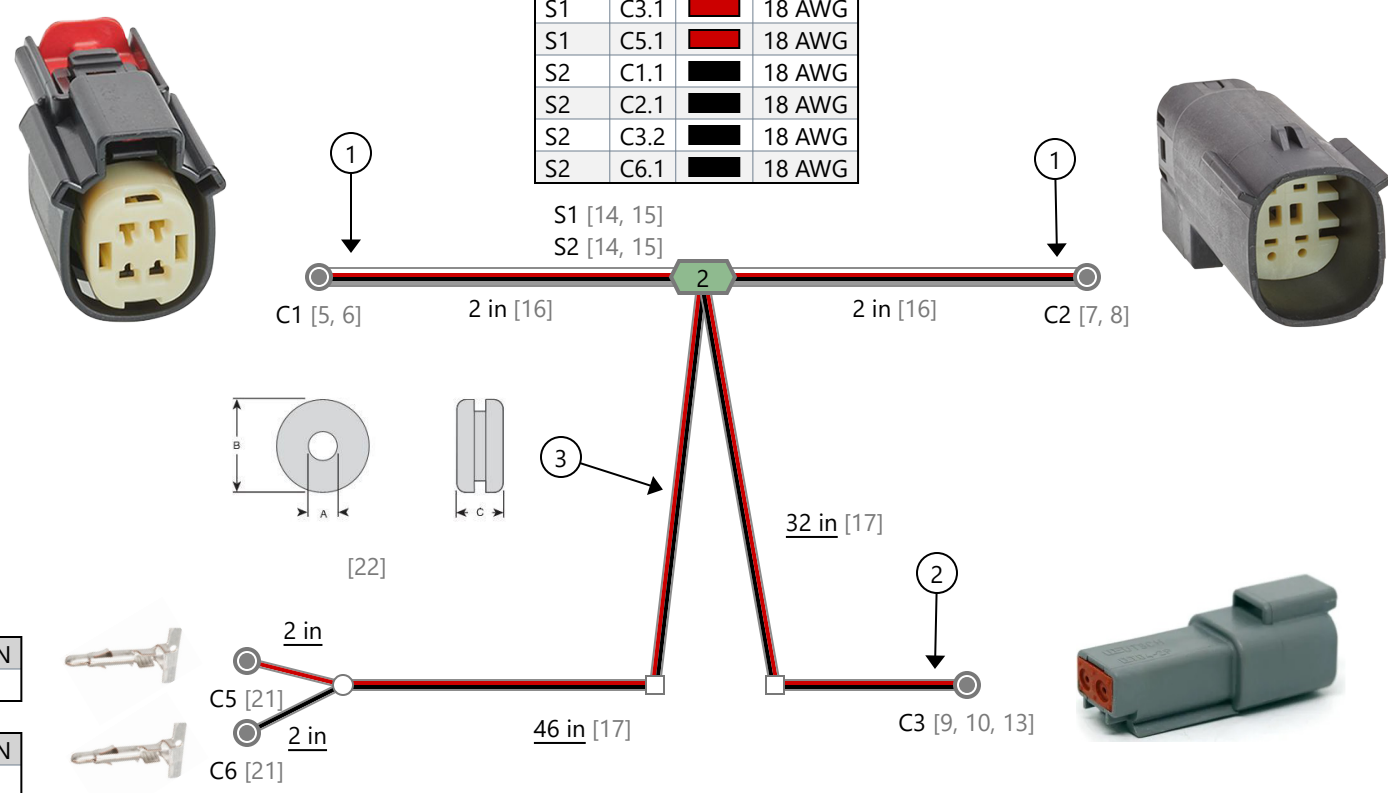

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (INCHES) TOLERANCES: ±.5MM		Name	Date		
PROPRIETARY AND CONFIDENTIAL		Designed By	Bennet Fisher 10/15/21		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AAMP GLOBAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AAMP GLOBAL IS PROHIBITED.		Engineering Approval	----		
		Manufacturing Approval	----		
		Revision Approval	Tony Tassillo 03/14/2022		
		Quality Assurance	----	Part Number: P-BUA-TRANSIT - Amazon	Revision: 2
				Description: 2021 Ford Transit Backup Alarm Harness	Sheet: 1 of 1

Revisions			
Rev.	Date	Author	Description
1	10/15/21	Bennet Fisher	Initial Drawing
2	3/14/2022	Tony Tassillo	Added branch with rear sensor connector.